


DIRECT MOUNT (PIPE TO FLANGE)

CE2VD2

With threaded horizontal port inlet on the front side and Flange outlet on the back side, test connection on the body. The isolating bonnet are positioned on the left and right hand side and the Equalizing Bonnet is positioned on the top.

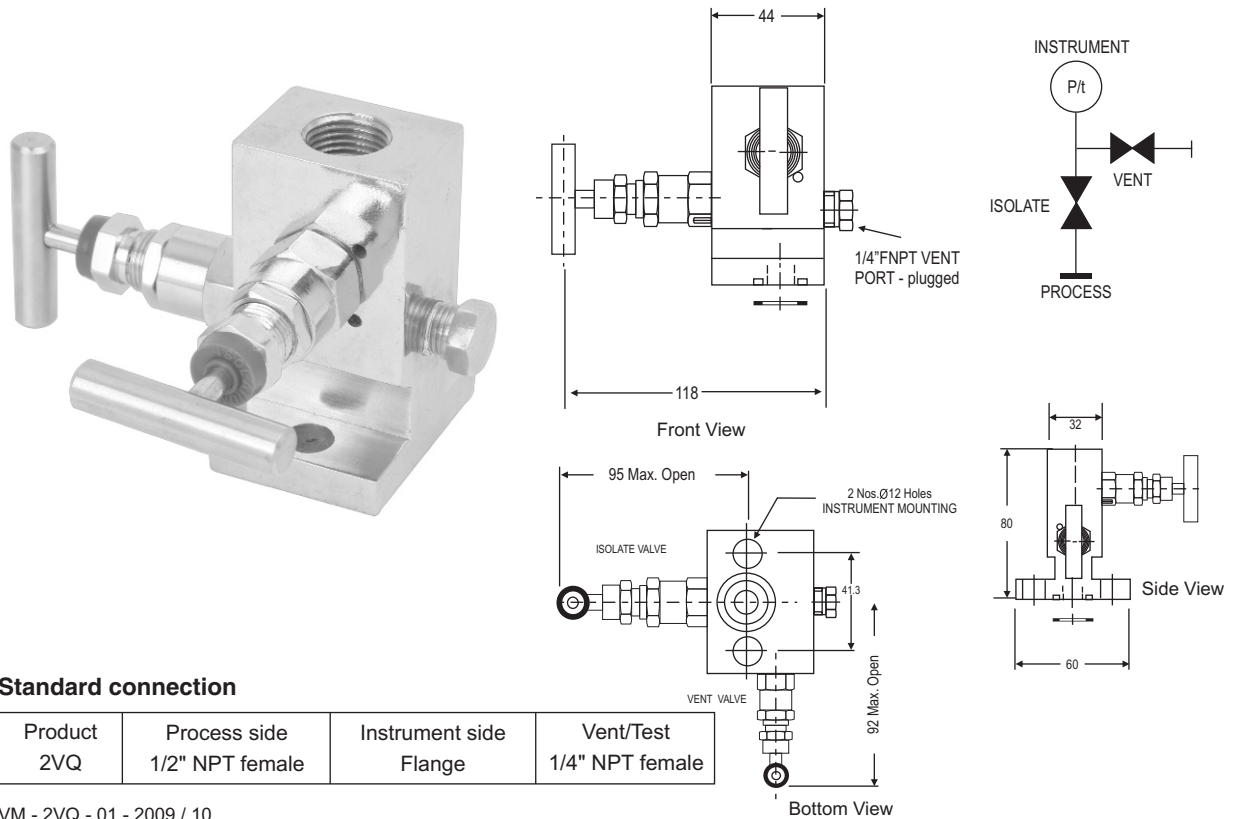

Standard connection

Product	Process side	Instrument side	Vent/Test
2VQ	1/2" NPT female	Flange	1/4" NPT female

VM - 2VQ - 01 - 2009 / 10

Specifications - Standard Version 2VQ

Body	: SS 316
Stem	: SS 316
Valve assembly	: SS 316
'T' bar handle	: SS 304
Maximum working pressure	: 6000 PSI
Maximum working temperature	: 240°C
Packing	: PTFE
Type of stem	: Type CT; Stem with conical metal tip
Drain port	: 1/4" NPT [F]; provided with SS 316 plug

How to order : 2VQ

Body Material	Stem Type	Stem Packing	Size = Inlet x Outlet	Connections	Threads
C = Carbon Steel	CT	P = PTFE	2F = 1/4"x Flange	FD = Female x Flange	N = NPT (ANSI B 1.20.1)
S = SS 316	DS	G = Grafoil	3F = 3/8"x Flange		P = BSPP (BS 2779, ISO 228/1)
S4 = SS 304			4F = 1/2"x Flange (std)		B = BSPT (BS 21, ISO 7/1)
SL = SS 316L					
M4 = Monel 400					
M5 = Monel 500					
H = Hastelloy C					