





REMOTE MOUNT (PIPE TO PIPE)

CE2VR1


With threaded horizontal port inlet, outlet and vent/test connection on the left hand side. The venting bonnet is positioned on the top and the isolating bonnet on the front.

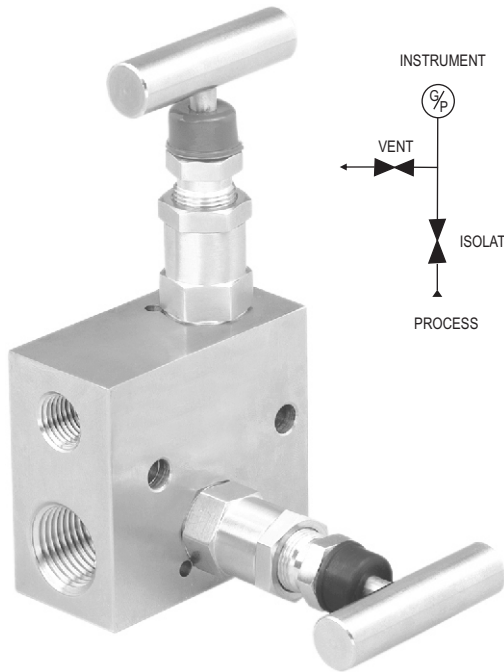


Top View



Front View



Side View

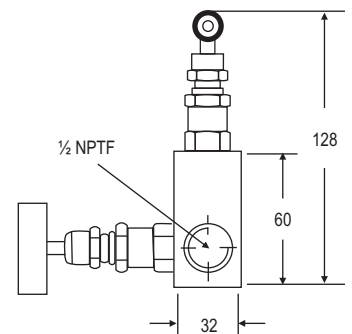

Side View

Standard connection



Product	Process side	Instrument side	Vent/Test
2VH	1/2" NPT female	1/2" NPT female	1/4" NPT female

VM - 2VH - 01 - 2009 / 10



REMOTE MOUNT (Pipe to Pipe)

CE2VR2


With threaded vertical port inlet and female outlet. The vent/test connection is positioned on the front side. The venting bonnet is positioned on the right hand side and the isolating bonnet on left hand side.

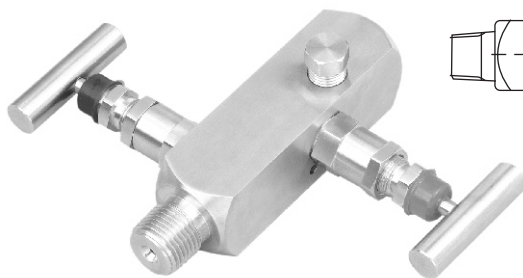

Front View



Top View

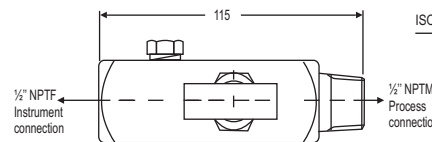

Back View


Standard connection

Product	Process side	Instrument side	Vent/Test
2VT	1/2" NPT male	1/2" NPT female	1/4" NPT female

VM - 2VT - 01 - 2009 / 10

CE2VR3

With threaded horizontal port inlet and outlet and vent/test connection on the right hand side. The venting bonnet is positioned angular on the top and the isolating bonnet on the front.

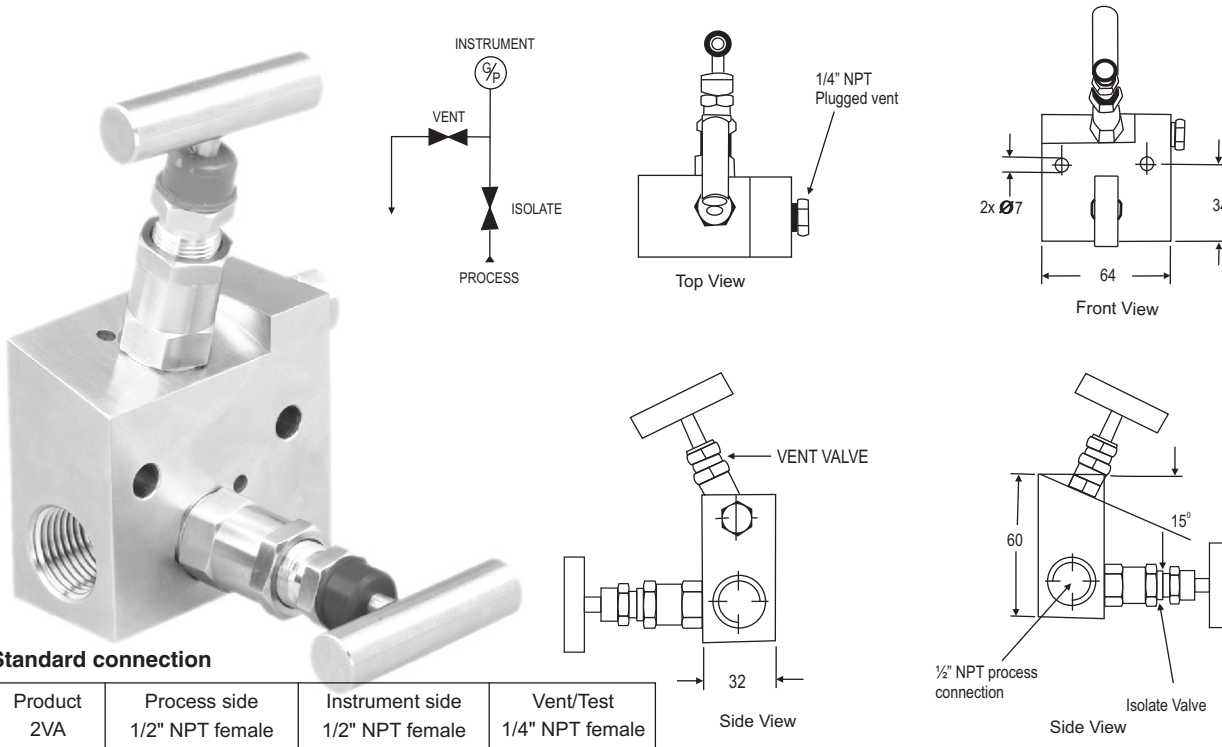


VM - 2VA - 01 - 2009 / 10

REMOTE MOUNT (Pipe to Pipe)

CE2VR4


With the vent is positioned near the male instrument connection side.

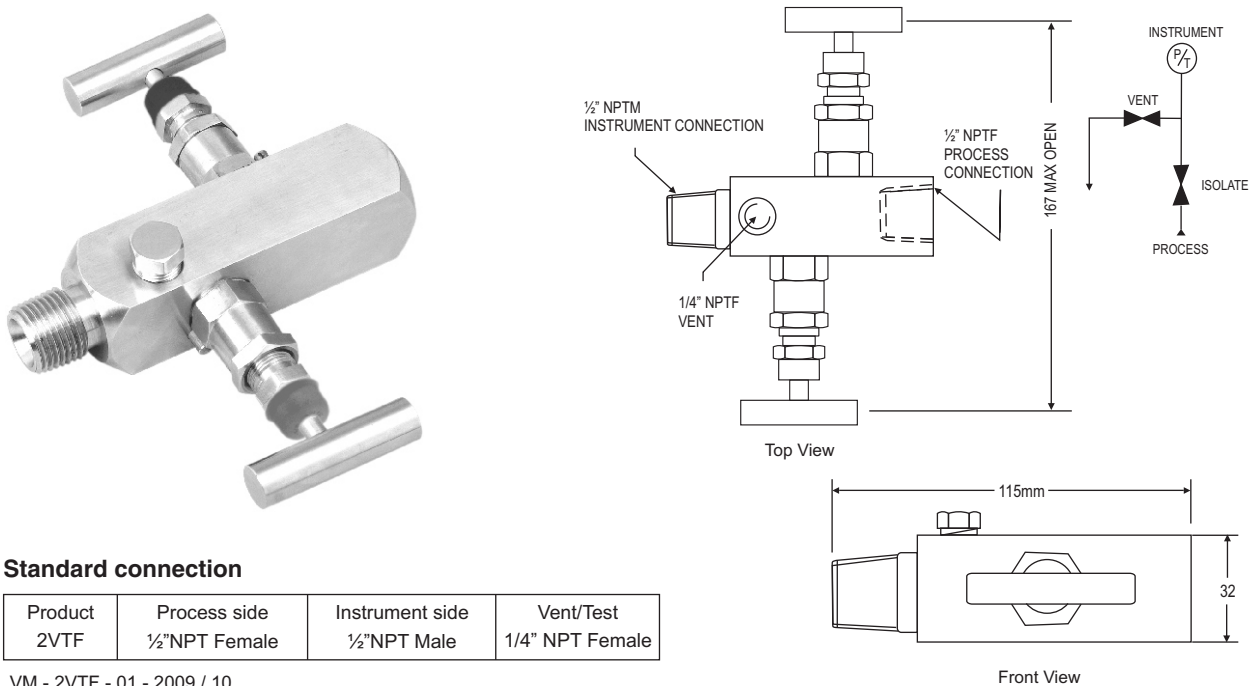

VM - 2VTF - 01 - 2009 / 10

CE2VR5

With threaded vertical port inlet and outlet. The vent/test connection is positioned on the front side. The drain bonnet is positioned on the right hand side and the isolating bonnet on the left hand side.

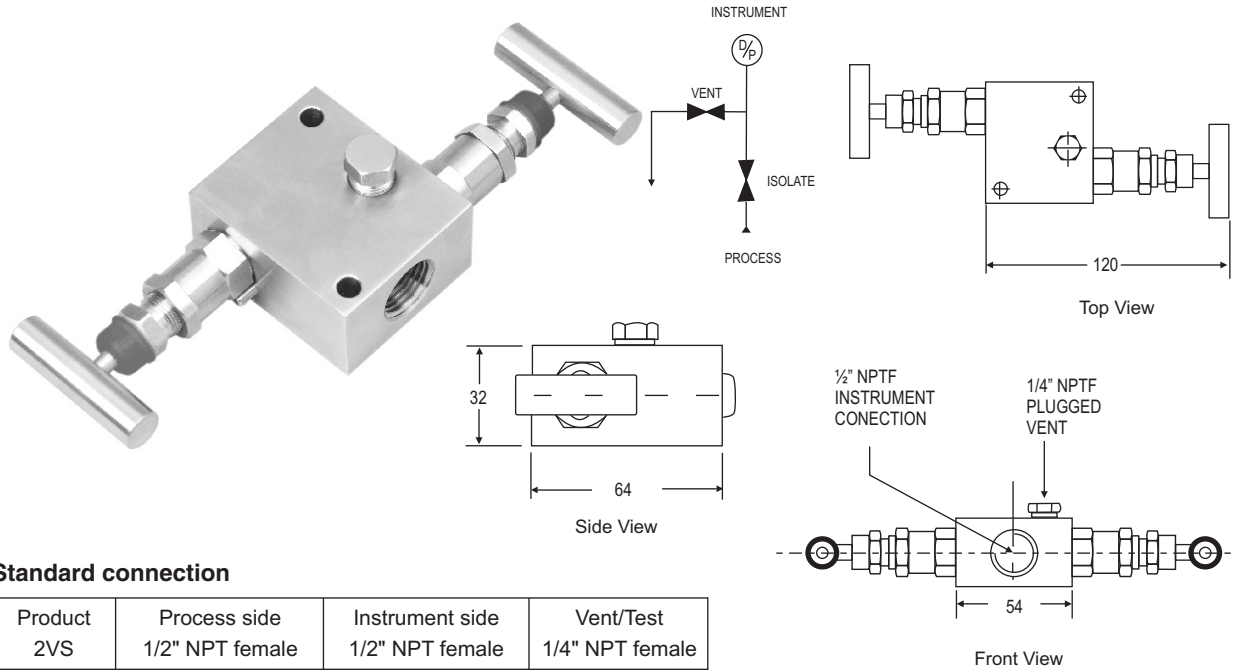

Standard connection


Product	Process side	Instrument side	Vent/Test
2VS	1/2" NPT female	1/2" NPT female	1/4" NPT female

VM - 2VS - 01 - 2009 / 10

REMOTE MOUNT (Pipe to Pipe)

CE2VR6

With threaded vertical port inlet and female outlet. The vent/test connection is positioned on the front side. The venting bonnet is positioned on the right hand side and the isolating bonnet on left hand side.

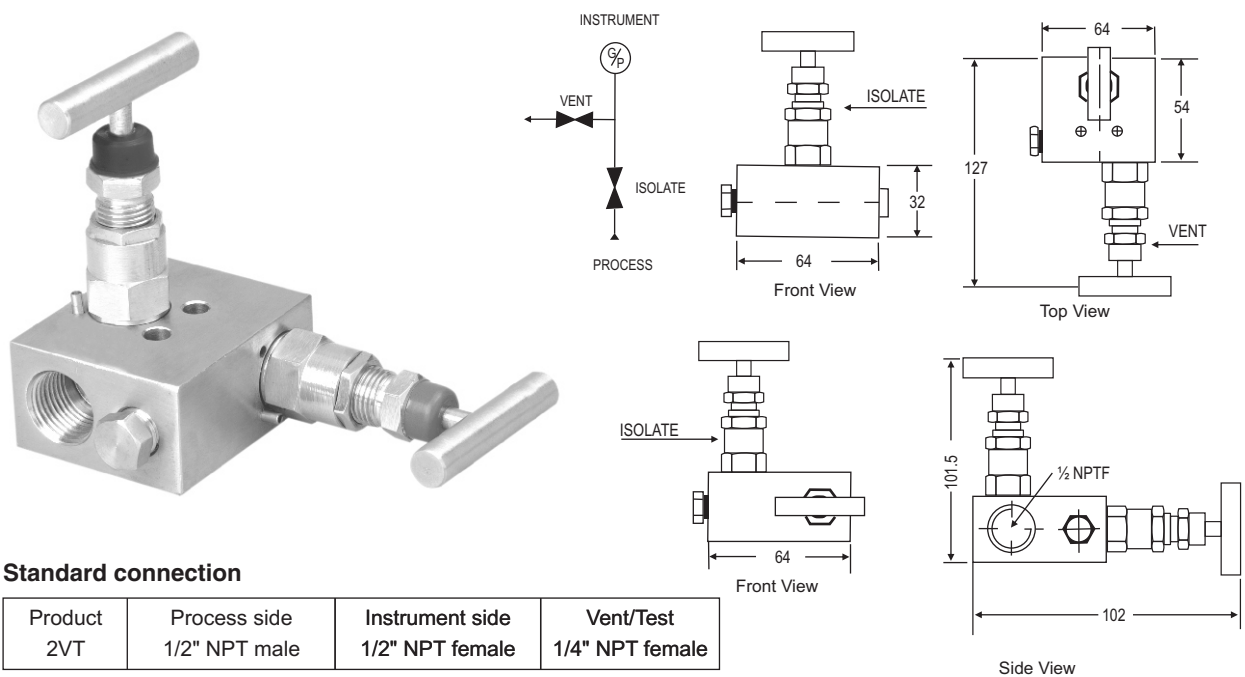

Standard connection

Product	Process side	Instrument side	Vent/Test
2VT	1/2" NPT male	1/2" NPT female	1/4" NPT female

VM - 2VT - 01 - 2009 / 10

REMOTE MOUNT (PIPE TO PIPE)

Specifications - Standard Version 2VH,2VT, 2VA, 2VTF, 2VS, 2VM

Body	: SS 316
Stem	: SS 316
Valve assembly	: SS 316
'T' bar handle	: SS 304
Maximum working pressure	: 6000 PSI
Maximum working temperature	: 240°C
Packing	: PTFE
Type of stem	: Type CT; Stem with conical metal tip
Drain port	: 1/4" NPT [F]; provided with SS 316 plug

How to order : 2VH,2VT, 2VTF, 2VA, 2VS, 2VM

Body Material	Stem Type	Stem Packing	Size = Inlet x Outlet	Connections	Threads
C = Carbon Steel	CT	P = PTFE	24 = 1/4" x 1/4"	MF = Male x Female	N = NPT (ANSI B 1.20.1)
S = SS 316	DS	G = Grafoil	33 = 3/8" x 3/8"	FF = Female x Female	P = BSPP (BS 2779, ISO 228/1)
S4 = SS 304			44 = 1/2" x 1/2"	SW = Socket weld	
SL = SS 316L			66 = 3/4" x 1/2"	FM = Female x Male	B = BSPT (BS 21, ISO 7/1)
M4 = Monel 400			2F = 1/4" Flange		
M5 = Monel 500			3F = 3/8" X Flange		
H = Hastelloy C			4F = 1/2" X Flange		

Options -

- IE : Handle circular.
- TF : Compliance to NACE standard MR-0175.
- SG : For Oxygen service, valves are supplied cleaned, degreased and suitably packed.
- GH : Material test certificate
- GO : Hydro test certificate
- MBC : Mounting bolts (7/16" UNF) in carbon steel (Model : MBC - M45, MBC - M25)
- MBS : Mounting bolts (7/16" UNF) in SS (Model : MBS - M45, MBS - M25)
- MB : Mounting Bracket
- ATV : Anti Tamper valve
- ATK : Anti Tamper key

Example

To place an order simply refer to the codes in the table.

Valve Type : Body Material + Stem Type + Stem Packing + Size + Connections + Threads + Options

2VA + S + CT + P + 44 + FF + N = 2VA-S-CT-P-44-FF-N-Options

NOTE:

- The weld prepared types are available with female plain end - suitable for socket weld.
- Anti-tamper bonnet - special design on request with locking arrangement if desired.