

How to order : MGT, MPV

Body Material	Stem Packing	Size = P x P1	Connections	Threads
C = Carbon Steel	P = PTFE	24 = 1/4" x 1/4"	FF = Female x Female	N = NPT (ANSI B 1.20.1)
S = SS 316	G = Grafoil	44 = 1/2" x 1/2"	MF = Male x Female	P = BSPP
S4 = SS 304		46 = 1/2" x 3/4"	SW = Socket Weld	(BS 2779, ISO 228/1)
SL = SS 316L		64 = 3/4" x 1/2"	FL = Female x extended long body end	B = BSPT (BS 21, ISO 7/1)
M4 = Monel 400		66 = 3/4" x 3/4"		
M5 = Monel 500				
H = Hastelloy C				
B = Brass				

Options -

IE : Handle circular.
TF : Compliance to NACE standard MR-0175.
SG : For Oxygen service, valves are supplied cleaned, degreased and suitably packed.
GH : Material test certificate
GO : Hydro test certificate
BLD8 : Bleeder 1/2" NPT (Male)
D8 : Plug 1/2" NPT (Male)
PV : IBR Approval

Example

To place an order simply refer to the codes in the table.

Valve Type : Body Material + Stem Packing+ Size + Connections + Threads + Options

MGT + S + P + 44 + MF + N = MGT - S - P - 44 - MF - N - Options

Note -
The weld prepared types are available with a male-or-female plain end - suitable for socket weld, or male butt weld end. Always specify pipe schedule and further requirements when ordering valves for welded or Flange connections. Panel mounting option for installation in racks and panels.

Standard Valve Materials

Valve	Body	Bonnet	Stem	Tip
Carbon Steel	CS A105	CS A105	SS 304	SS 304
Stainless Steel	SS 316	SS 316	SS 316	SS 316
Monel	Monel	Monel	Monel	Monel

MPV

Type multiport gauge valve, being a completely roddable multi-outlet gauge valve, is most suitable for viscous applications and plugging services. Useable on gauge or instrument installations without additional penetration of the main piping for versatile multiple positioning purpose. The flow path of the valve is easy to clean for viscous fluid application. Available with a male inlet and three female outlet ports or female inlet and three female outlets. Main inlet either screwed or prepared for welding. Bleed valves and plugs to suit outlet ports supplied optional.


Technical specifications

Design Pressure	:	6000 PSI
Max temp.	:	240°C
Stem	:	(DS)Delrin Soft Needle Tip rolled into the needle
Stem packing area	:	Burnished finish for smooth valve operation
Features	:	Replaceable soft seat which absorbs contaminants and operates in dirty service and straight through design for high capacity bi-directional flow.



Size	Type	Length A	Width B	Height (open) Max., C	Handle D	Handle OD E
1/4"	FxF	74	25	64.5	40	10
	MxF	84	25	64.5	40	10
3/8"	FxF	74	25	64.5	40	10
	MxF	84	25	64.5	40	10
1/2"	FxF	102	32	94	50	12
	MxF	115	32	94	50	12
3/4"	FxF	102	38	97	50	12
	MxF	115	38	97	50	12


All dimensions are in mm

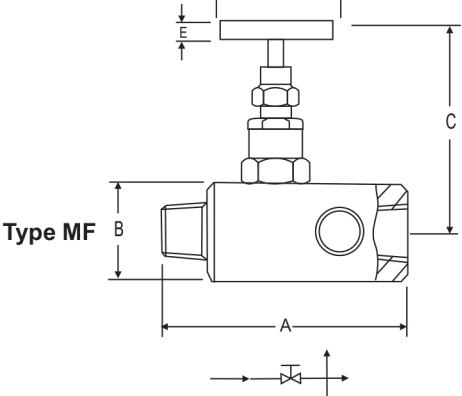

Type MF

Applications

- Multiple gauge or instrument mounting
- Instrument isolation
- Instrument installation with separate vents and calibrate connections
- Liquid and vapor gas service

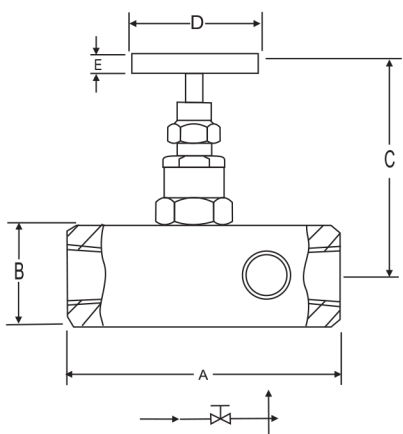

Type FF


Note : Other combination sizes available on request. Please contact us for more details.

MGT

Type multiport gauge valves are ideal for use on gauge or instrument installations without further penetrations of the main piping. A gauge valve with multiple outlets and inlets with in various sizes and connections. The standard three 1/2" NPT female screwed outlet ports offer a flexibility of alternative applications. Available with a male inlet and three female outlet ports or female inlet and three female outlets. Bleed valves and plugs to suit outlet ports supplied optional.

Technical specifications

Design Pressure	:	6000 PSI
Max temp.	:	240°C
Stem	:	(Type CT) Conical tip press fitted hard chrome plated
Gland Packing	:	PTFE
Stem packing area	:	Burnished finish for smooth valve operation.
Safety Feature	:	Back seating for preventing stem blowout.
Feature	:	Multi outlet design extended valve inlet up to 4" max. for pipe insulation.

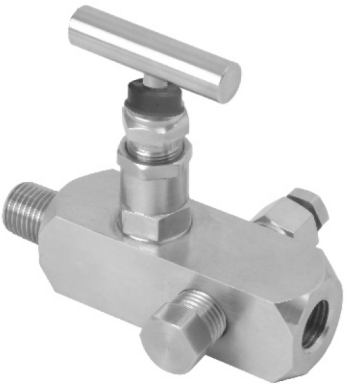


Size	Type	Length A	Width B	Height (open) Max., C	Handle D	Handle OD E
1/4"	FxF	74	25	65	40	10
	MxF	84	25	65	40	10
3/8"	FxF	74	25	65	40	10
	MxF	84	25	65	40	10
1/2"	FxF	102	32	86.6	50	11
	MxF	115	32	86.6	50	11
3/4"	FxF	102	38	86.8	50	11
	MxF	115	38	86.6	50	11

All dimensions are in mm


Applications

- Mounting of instruments or multiple gauges
- Instrument isolation
- Instrument installation with separate vents And calibrate connections
- Liquid and vapor gas service

Optional : MGT 10 - High pressure valves for 10,000 psi pressure

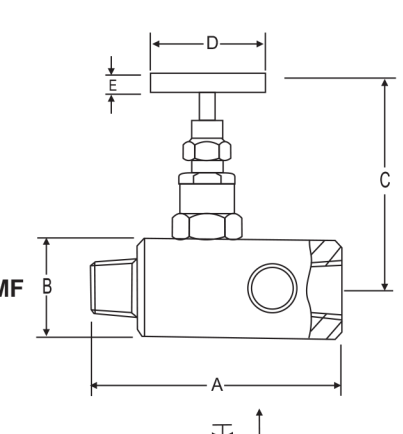

Type MF

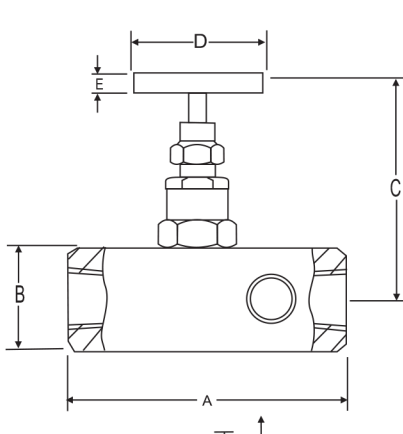

Type FF

Type MM

Note : Other combination sizes available on request. Please contact us for more details.